

# b-3,6,12

the pacesetter in quality prefab roof products



245 eisenhower lane south • lombard, illinois 60148  
 630.705.1920 • 800.243.3018 • fax 630.705.1930  
 www.patecurbs.com • e-mail: sales@patecurbs.com


## pate boots

### standard construction

Graduated step boots are molded from KZ-10 black plastisol (PVC), 65 durometer, continuous temperature rating from -40 to +200 degrees Fahrenheit, are extremely durable, with a high degree of stretch to accommodate varying pipe diameters and are UV rated to provide long life when exposed to the harmful effects of the sun.

p.o. no. \_\_\_\_\_  
 customer \_\_\_\_\_  
 \_\_\_\_\_  
 project \_\_\_\_\_  
 location \_\_\_\_\_  
 \_\_\_\_\_  
 architect \_\_\_\_\_  
 engineer \_\_\_\_\_

### pate boots

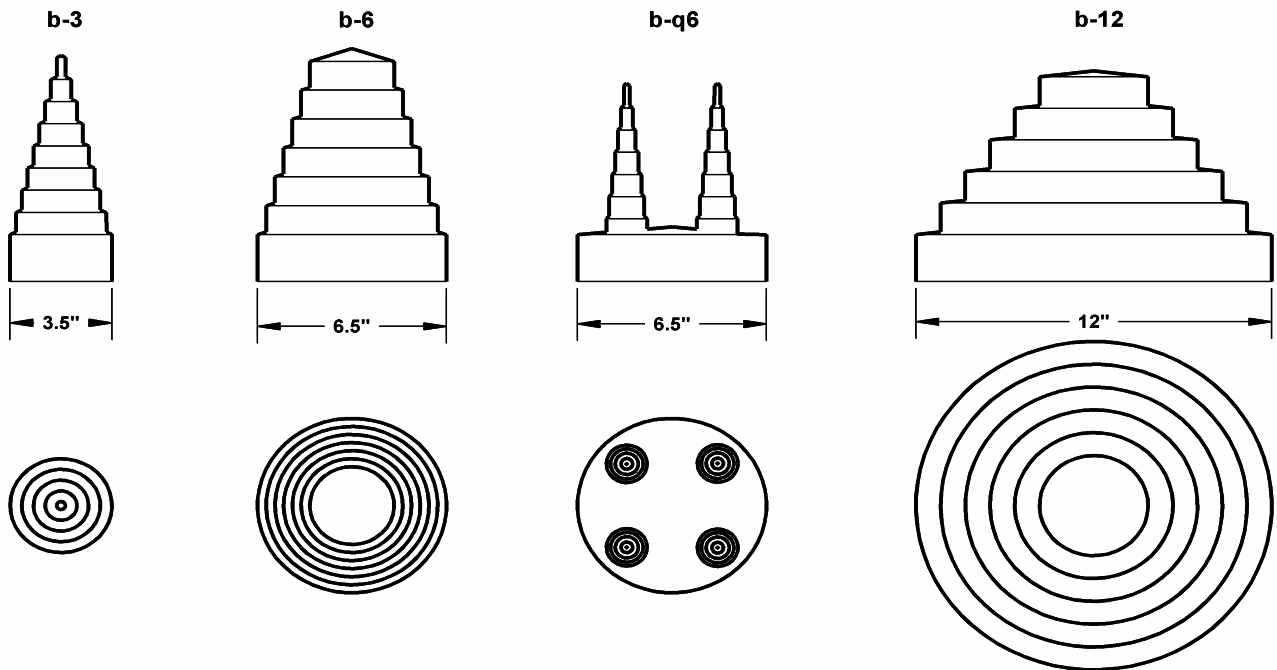

### pipe boot requirements

quantity	boot	pipe sizes <b>NOTE: sizes listed are actual O.D.</b>	clamps required	used with		tag
				cap	base	
	<b>b-3</b>	1 pipe: 1/2" - 2 7/8" O.D.	2	<b>pcc-1,2,3,5</b>	<b>psb-3</b>	
	<b>b-6</b>	1 pipe: 3" - 5 1/2" O.D.	2	<b>pcc-2,3,6</b>	<b>psb-6</b>	
	<b>b-q6</b>	for up to 4 pipes: 3/8" - 2" O.D.	5	<b>pcc-2,3,6</b>	<b>psb-6</b>	
	<b>b-12</b>	1 pipe: 6" - 10 3/4" O.D.	2	<b>pcc-4</b>	<b>psb-12</b>	