

# mpca-1,2,5

the pacesetter in quality prefab roof products



245 eisenhower lane south • lombard, illinois 60148  
 630.705.1920 • 800.243.3018 • fax 630.705.1930  
 www.patecurbs.com • e-mail: sales@patecurbs.com

## pate multiple pipe curb assemblies

### standard construction

Heavy gauge galvanized steel, unitized construction, full mitered corners, all seams welded, 1 1/2" thick rigid fiberglass insulation, 2 x 4 wood nailer strip, galvalume steel trough(s), acrylic clad ABS plastic covers, PVC boots and stainless steel clamps.

p.o. no. \_\_\_\_\_  
 customer \_\_\_\_\_  
 \_\_\_\_\_  
 project \_\_\_\_\_  
 location \_\_\_\_\_  
 \_\_\_\_\_  
 architect \_\_\_\_\_  
 engineer \_\_\_\_\_

### pate multiple pipe curb assemblies

#### cap and boot packages

#### mpca-5 with 3 modules shown

**NOTE:** sizes listed are actual O.D.

**pcc-1** for up to 4 pipes: 1/2" - 2 7/8" O.D.

**pcc-2** for up to 2 pipes: 1/2" - 2 7/8" O.D.  
and 1 pipe: 3" - 5 1/2" O.D.

**pcc-2q6** for up to 2 pipes: 1/2" - 2 7/8" O.D.  
and for up to 4 pipes: 3/8" - 2" O.D.

**pcc-3** for up to 2 pipes: 1/2" - 2 7/8" O.D.  
and for up to 2 pipes: 3" - 5 1/2" O.D.


**pcc-3q6** for up to 2 pipes: 1/2" - 2 7/8" O.D.  
and for up to 8 pipes: 3/8" - 2" O.D.

**pcc-4** for 1 pipe: 6" - 10 3/4" O.D.


**pcc-5** for up to 5 pipes: 1/2" - 2 7/8" O.D.

**pcc-6** for 1 pipe: 3" - 5 1/2" O.D.

**pcc-6q6** for up to 4 pipes: 3/8" - 2" O.D.

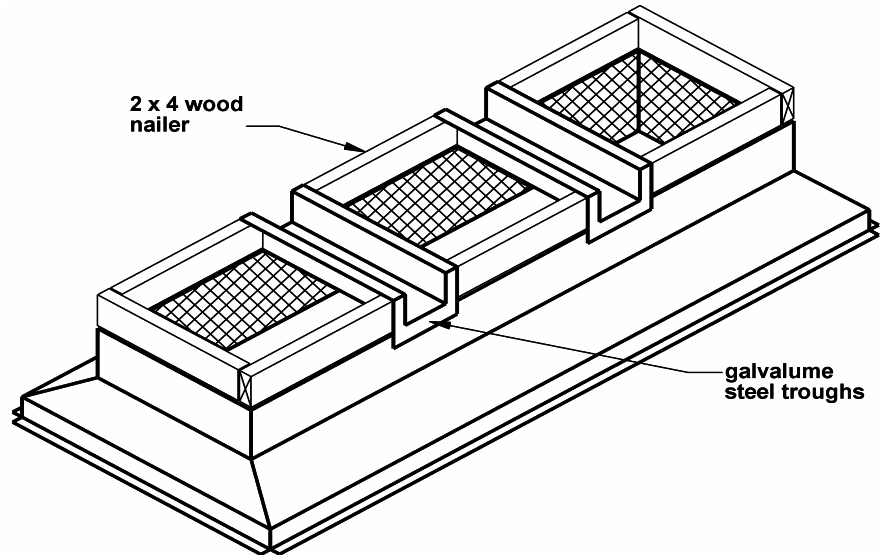

Available with any number of curb caps to accommodate virtually any variety of pipes 3/8" to 10 3/4" actual O.D.

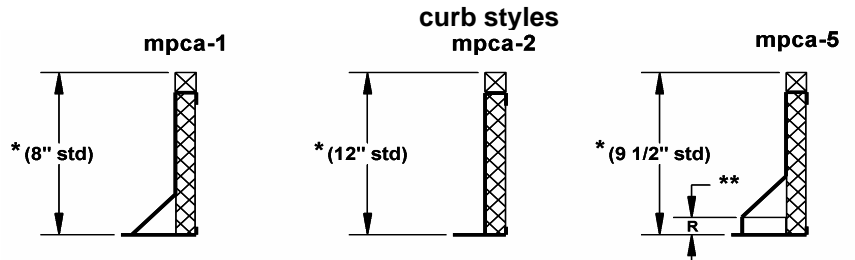

### multiple pipe curb assembly requirements

quantity	curb style mpca-	number of modules	*curb height	**raised cant height	cap & boot packages pcc-	tag