dss-1,2,5

the pacesetter in quality prefab roof products

the pate company
245 eisenhower lane south • lombard, illinois 60148
630.705.1920 • 800.243.3018 • fax 630.705.1930
www.patecurbs.com • e-mail: sales@patecurbs.com

pate
duct support system

standard construction

Support Rail
Heavy ga. galvanized steel, unitized construction with internal base plate, continuous welded corner seams, pressure treated wood nailer, counterflashing with screws. Internally re-inforced to conform with **pate** load bearing factors.

Duct Mounting Hardware
Unistrut legs, support saddle and slides to allow for duct movement, vertical and horizontal adjustment.

p.o. no. _____
customer _____
_____
project _____
location _____
_____
architect _____
engineer _____

pate duct support system

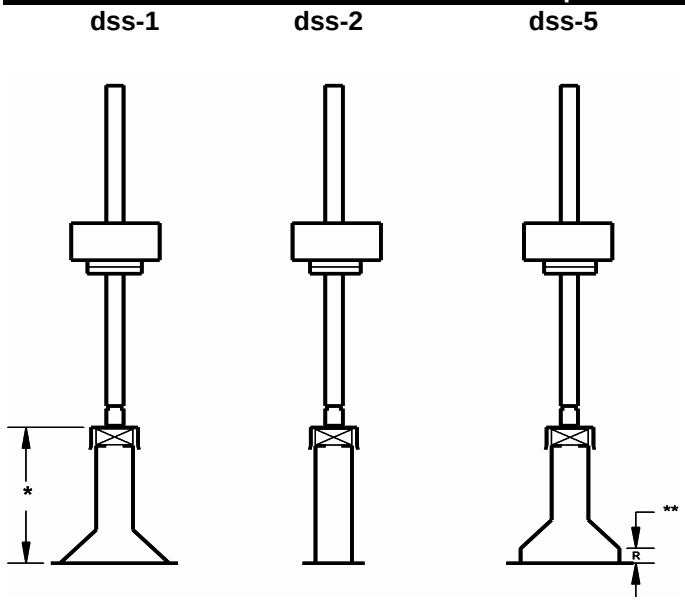

* standard support height: dss-1 = 8"
dss-2 = 12"
dss-5 = 9 1/2" (R = 1 1/2")

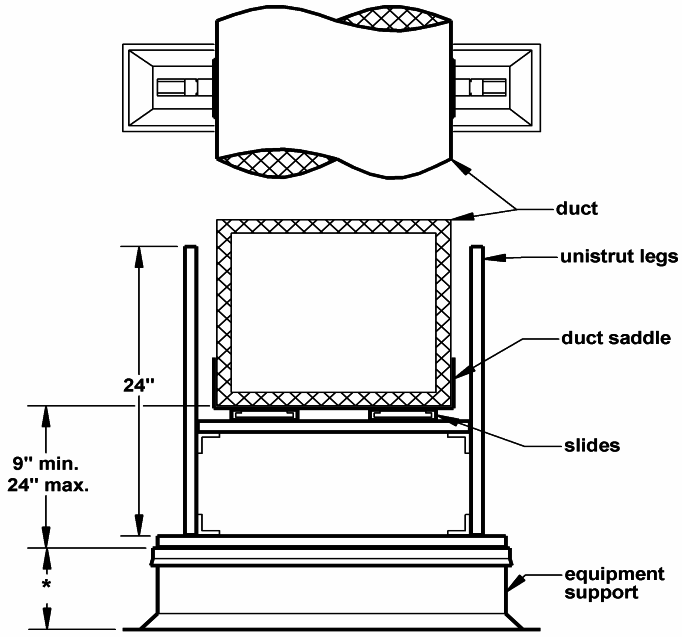

also available for round duct

duct support system requirements

quantity	style	nailer length	nailer width	* overall height	** raised cant height	duct size	square or round	tag

©2006 the pate company