

pc-2-sfcs

the pacesetter in quality prefab roof products



245 eisenhower lane south • lombard, illinois 60148
 630.705.1920 • 800.243.3018 • fax 630.705.1930
 www.patecurbs.com • e-mail: sales@patecurbs.com

pate self flashing certified seismic curb

standard construction

Heavy ga. galvanized steel, unitized construction with full mitered corners all seams welded, 1 1/2" thick rigid fiberglass insulation.



pc-2sfcs curbs for self flashing applications have 3" flanges and no wood nailer. Curbs are constructed and internally reinforced to meet seismic category D, use group III, importance factor 1.5 of the IBC 2000. Foam gasket supplied with curb.

p.o. no. _____
 customer _____

 project _____
 location _____

 architect _____
 engineer _____

pc-2sfcs pate certified seismic curb

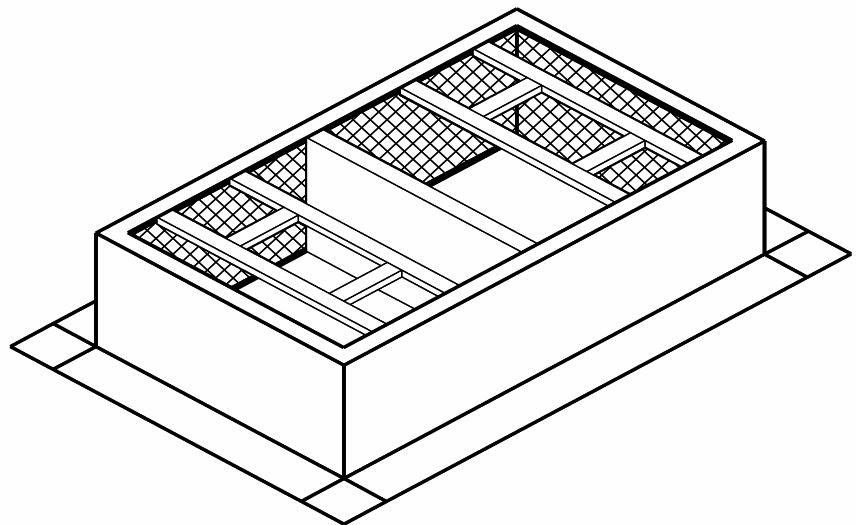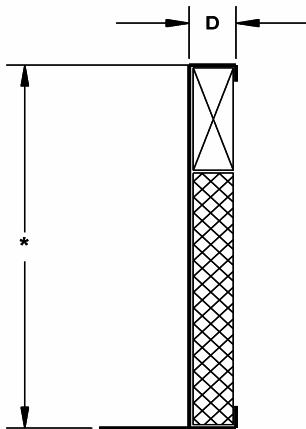

roof curb requirements

| quantity | style | dimensions | | * overall height | D | RTU manufacturer & model | tag |
|----------|-------|------------|------|------------------|---|--------------------------|-----|
| | | O.D. | I.D. | | | | |
| | | | | | | | |