

# pc-2sf-sd

the pacesetter in quality prefab roof products



245 eisenhower lane south • lombard, illinois 60148  
 630.705.1920 • 800.243.3018 • fax 630.705.1930  
 www.patecurbs.com • e-mail: sales@patecurbs.com



## pate self flashing side discharge curbs

### standard construction

Heavy ga. galvanized steel, unitized construction with full mitered corners, all seams welded, 1 1/2" thick duct liner insulation. All curbs are internally reinforced. Insulated cross wall and 1 1/2" foam gasket provided for weatherproofing. Mounting flanges provided at side discharge openings.

p.o. no. \_\_\_\_\_  
 customer \_\_\_\_\_  
 \_\_\_\_\_  
 project \_\_\_\_\_  
 location \_\_\_\_\_  
 \_\_\_\_\_  
 architect \_\_\_\_\_  
 engineer \_\_\_\_\_

### pc-2sf-sd pate curbs shown with optional insulated solid bottom

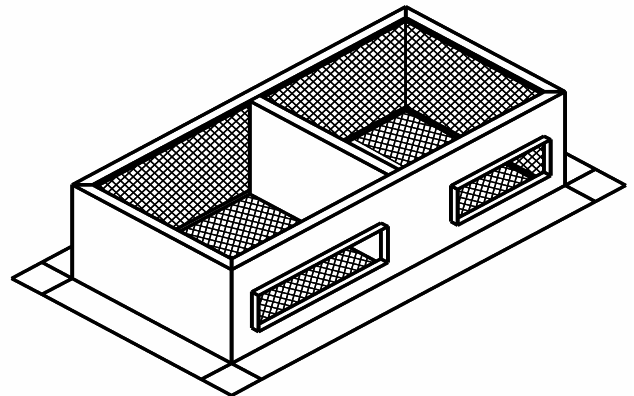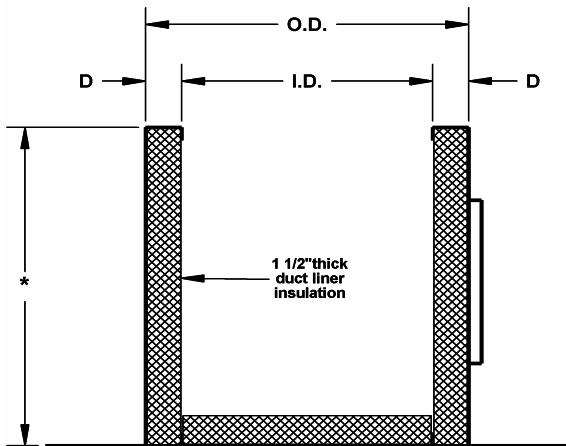

### roof curb requirements

quantity	style	dimensions		* overall height	supply opening w x h	return opening w x h	D	tag
		O.D.	I.D.					