

pc-2sf-sd

the pacesetter in quality prefab roof products



245 eisenhower lane south • lombard, illinois 60148
 630.705.1920 • 800.243.3018 • fax 630.705.1930
 www.patecurbs.com • e-mail: sales@patecurbs.com

pate self flashing side discharge curbs

standard construction



Heavy ga. galvanized steel, unitized construction with full mitered corners, all seams welded, 1 1/2" thick duct liner insulation. All curbs are internally reinforced. Insulated cross wall and 1 1/2" foam gasket provided for weatherproofing. Mounting flanges provided at side discharge openings.

p.o. no. _____
 customer _____

 project _____
 location _____

 architect _____
 engineer _____

pc-2sf-sd pate curbs shown with optional insulated solid bottom

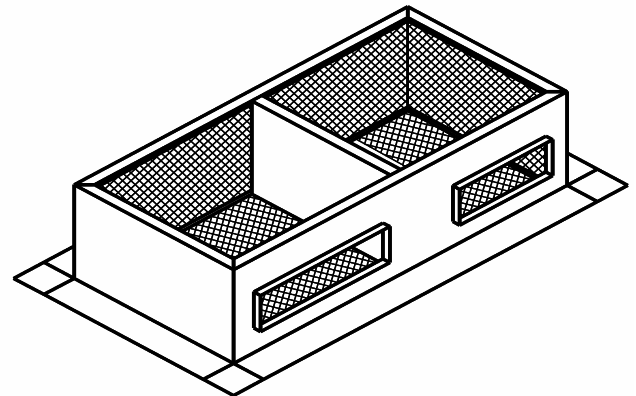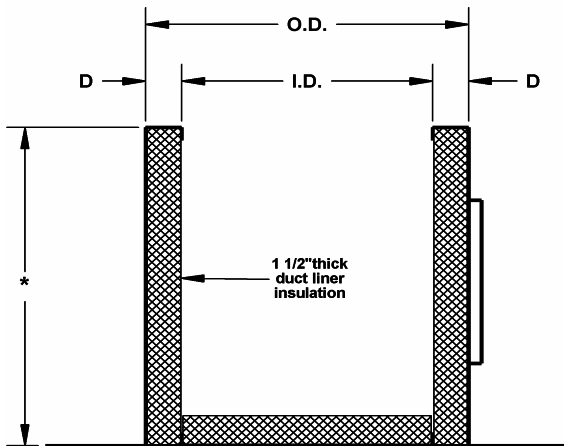

roof curb requirements

quantity	style	dimensions		* overall height	supply opening w x h	return opening w x h	D	tag
		O.D.	I.D.					